




NovaTel 110 Wiring Block Base, 19" Rack Mount Category 5e, 200-Pair, With Label Strips, No Connecting Blocks

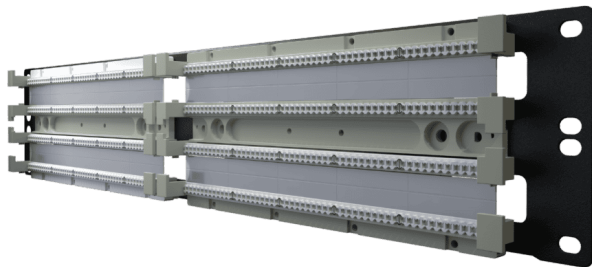

Applicable Standards

- UL 1863 : Standard for Communications Circuit Accessories
- UL94V-0 : Flame Retardant Rating
- TIA/EIA-568 : Commercial Building Telecommunications Cabling Standard
- ISO/IEC 11801: Generic Cabling for Customer Premises
- ANSI/TIA-570 : Residential Telecommunications Cabling Standard

Product Part Number

N061.R200NCB

Product Description

The NovaTel 110 Wiring Block Base, 19" Rack Mount, 200-Pair is a professional-grade solution for structured cabling systems. Designed for compatibility with Category 5e and lower cables, this rack-mountable wiring block ensures efficient and organized network connections. Built with high-quality UL94V-0 fire-retardant plastic and a robust SPCC steel mounting plate, it delivers durability and safety. The 110 IDC compatibility supports 3-pair, 4-pair, and 5-pair connector blocks, making it versatile for various setups. Included label strips simplify cable identification, making it an ideal choice for modern data and telecommunications installations.

Product Features

- UL 1863 Safety Listed : Certified for safety in telecommunication systems, ensuring reliable and compliant installations.
- Fire Retardant Construction : Crafted from UL94V-0 rated plastic, providing enhanced fire resistance for added safety in the field.
- Category 5e and Downward Compatibility : Supports Category 5e and lower standards, offering flexibility for various network configurations.
- 110 IDC Design Compatibility : Compatible with 3-pair, 4-pair, and 5-pair 110 IDC connector blocks for versatile installation options.
- Durable SPCC Mounting Plate : The sturdy SPCC steel mounting plate ensures reliable installation in 19" rack systems.





NovaTel 110 Wiring Block Base, 19" Rack Mount Category 5e, 200-Pair, With Label Strips, No Connecting Blocks

Material Specifications

Mounting Style	19" Rack Mount
Pair Capacity	200 Pairs
Category Compatibility	Category 3 / Category 5e
Material	High-Impact, Fire-Retardant Plastic (UL94V-0)
Safety Certification	UL 1863 Safety Listed
Connector Compatibility	110 IDC Design (3-pair, 4-pair, and 5-pair)
Mounting Plate Material	SPCC (Steel Plate Cold Commercial)
Labeling	Includes label strips for easy cable identification
Color	Off-White

Environmental Specifications

Operating Temperature Range	-10°C to 60°C
Storage Temperature Range	-40°C to 70°C
Installation Temperature Range	0°C to 50°C

Ordering Information

N061.R200NCB	NovaTel 110 Wiring Block Base, 19" Rack Mount Category 5e, 200-Pair, With Label Strips, No Connecting Blocks
--------------	--

Shipping Information

Item	Dimension
Product	Width: 482.60mm Height: 88.10mm Depth : 48.70mm

